

FIG.1

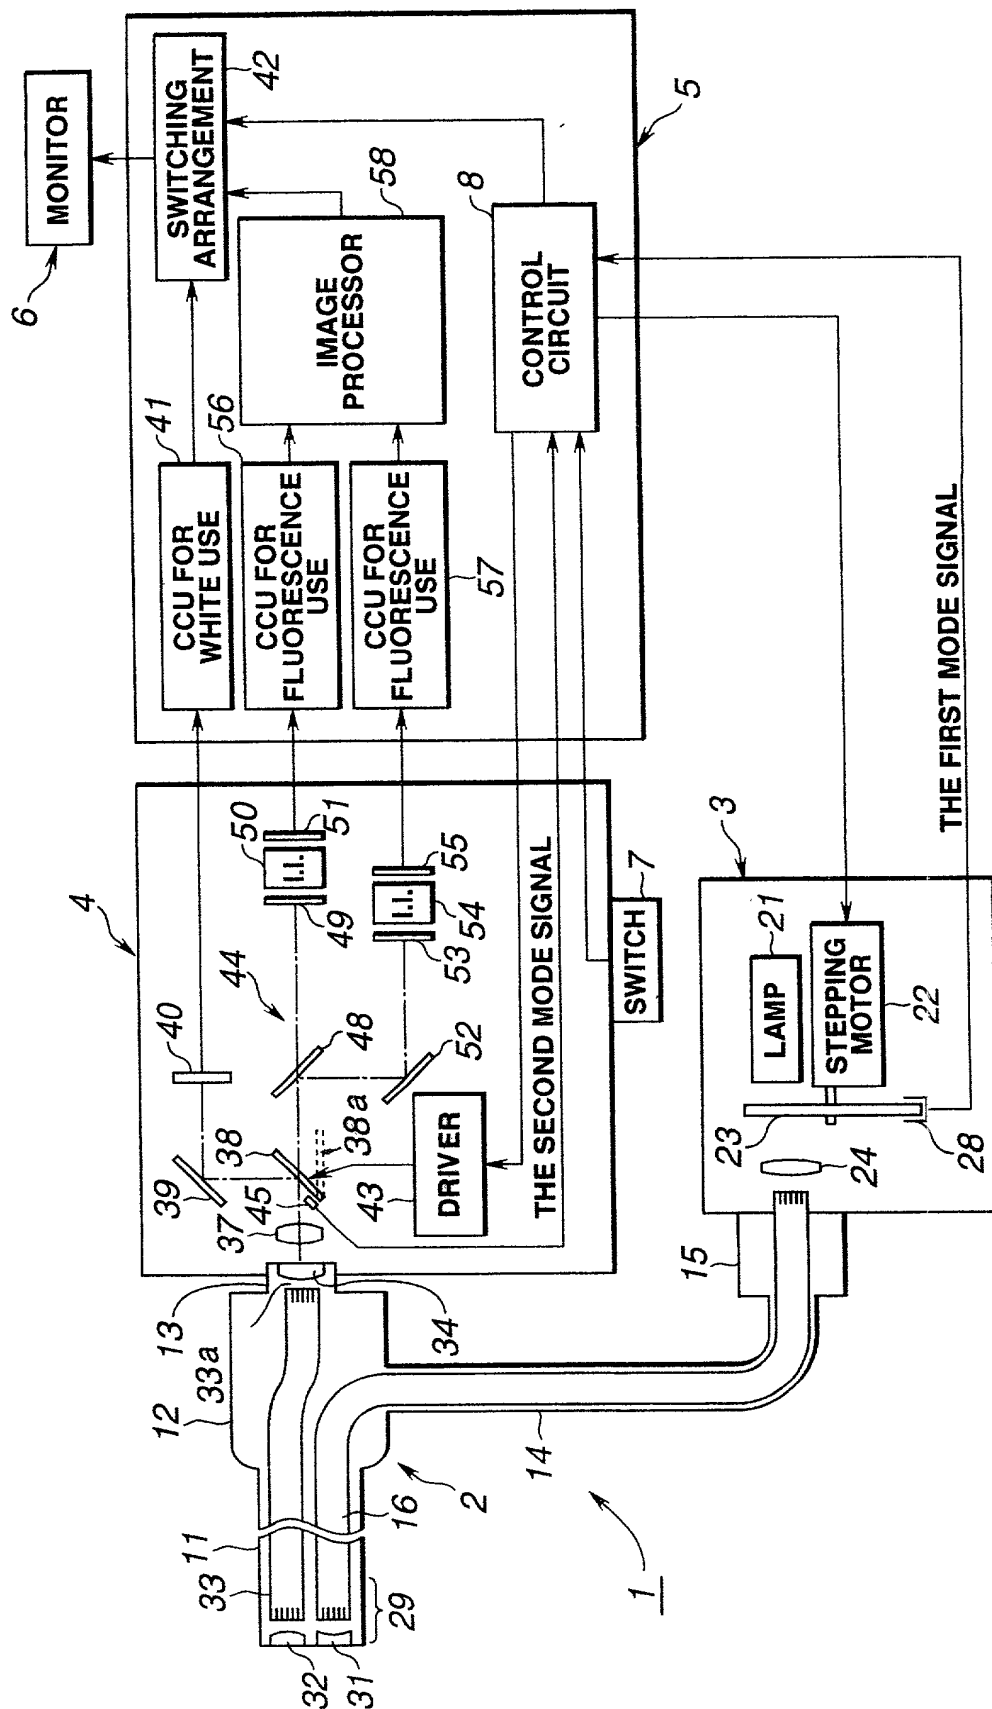


FIG.2

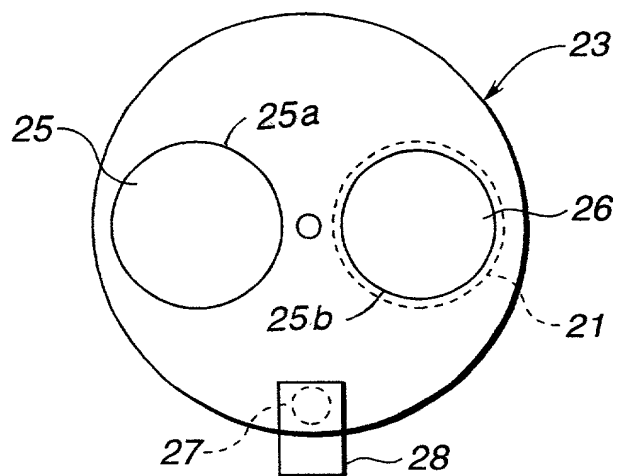


FIG.3

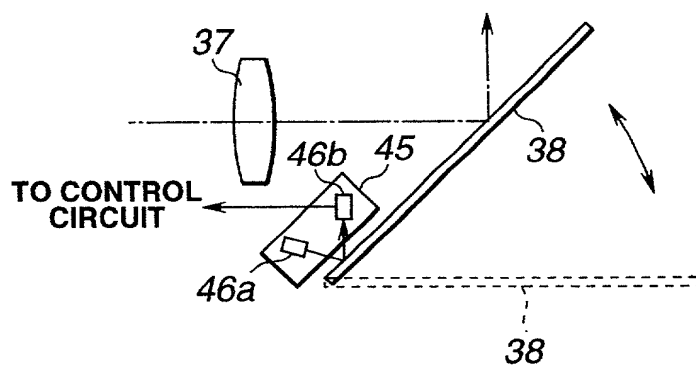


FIG.4

SWITCHING CONDITION OF EACH DEVICE		CAMERA CONDITION
LIGHT SOURCE DEVICE	CONTROL CENTER	
OFF	OFF	INOPERATIVE
ON	OFF	INOPERATIVE
OFF	ON	WHITE LIGHT MODE
ON	ON	WHITE LIGHT MODE
ON (PHOTOCOUPLER)- (PHOTOCOUPLER)+	ON	WHITE LIGHT MODE
		FLUORESCENCE MODE

FIG.5

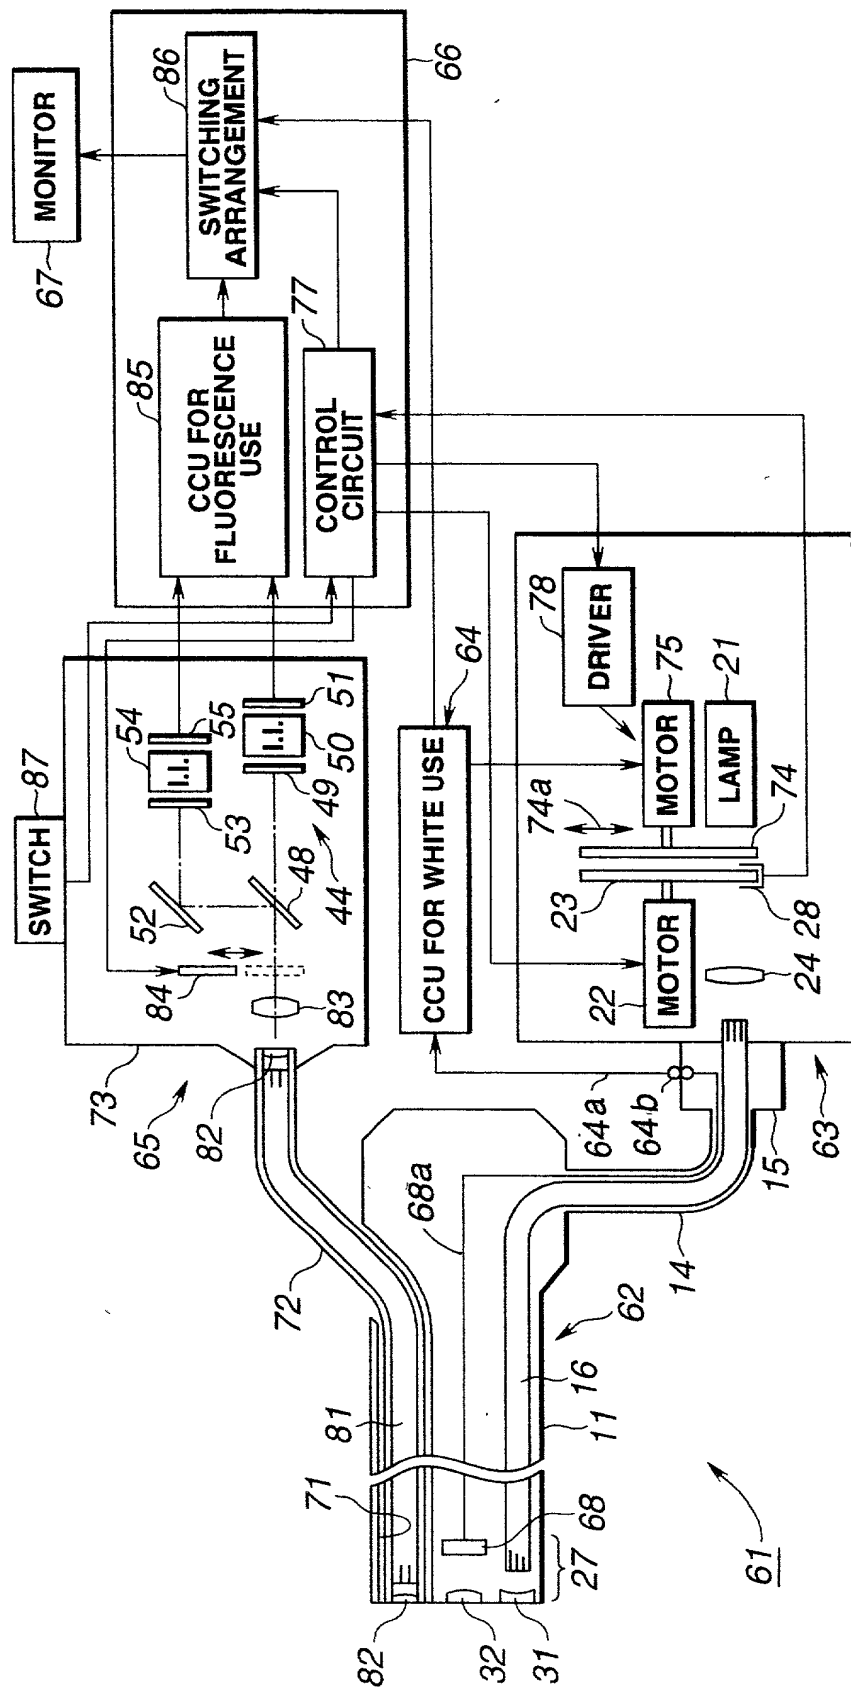


FIG.6

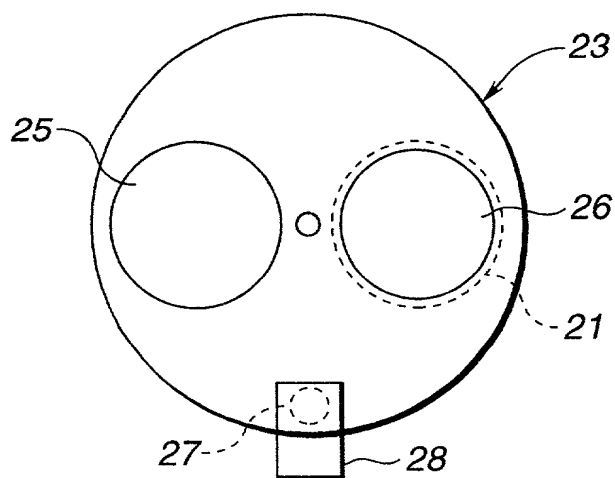


FIG.7

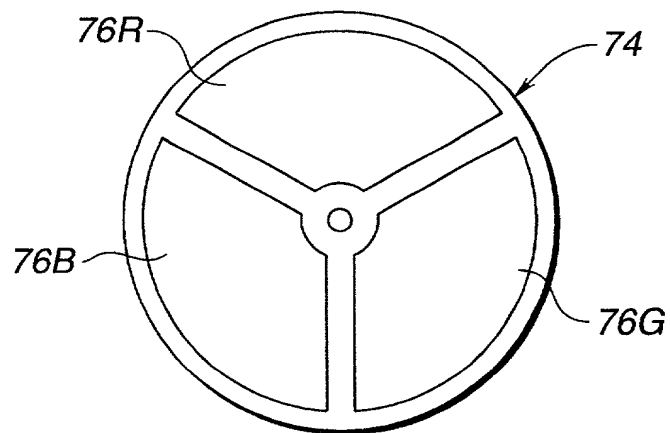


FIG.8

SWITCHING CONDITION OF EACH DEVICE		CAMERA SHUTTER
LIGHT SOURCE DEVICE	CONTROL CENTER	
OFF	OFF	CLOSED
ON	OFF	CLOSED
OFF	ON	CLOSED
ON	ON	CLOSED
ON (PHOTOCOUPLER)- (PHOTOCOUPLER)+	ON	CLOSED
		OPEN

FIG.9

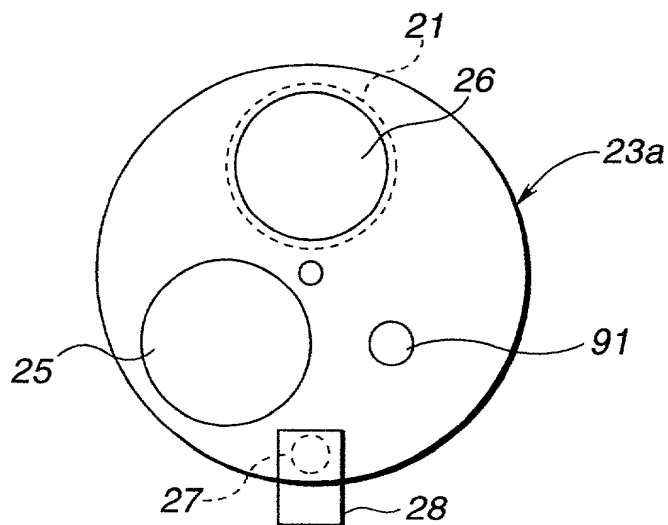


FIG.10

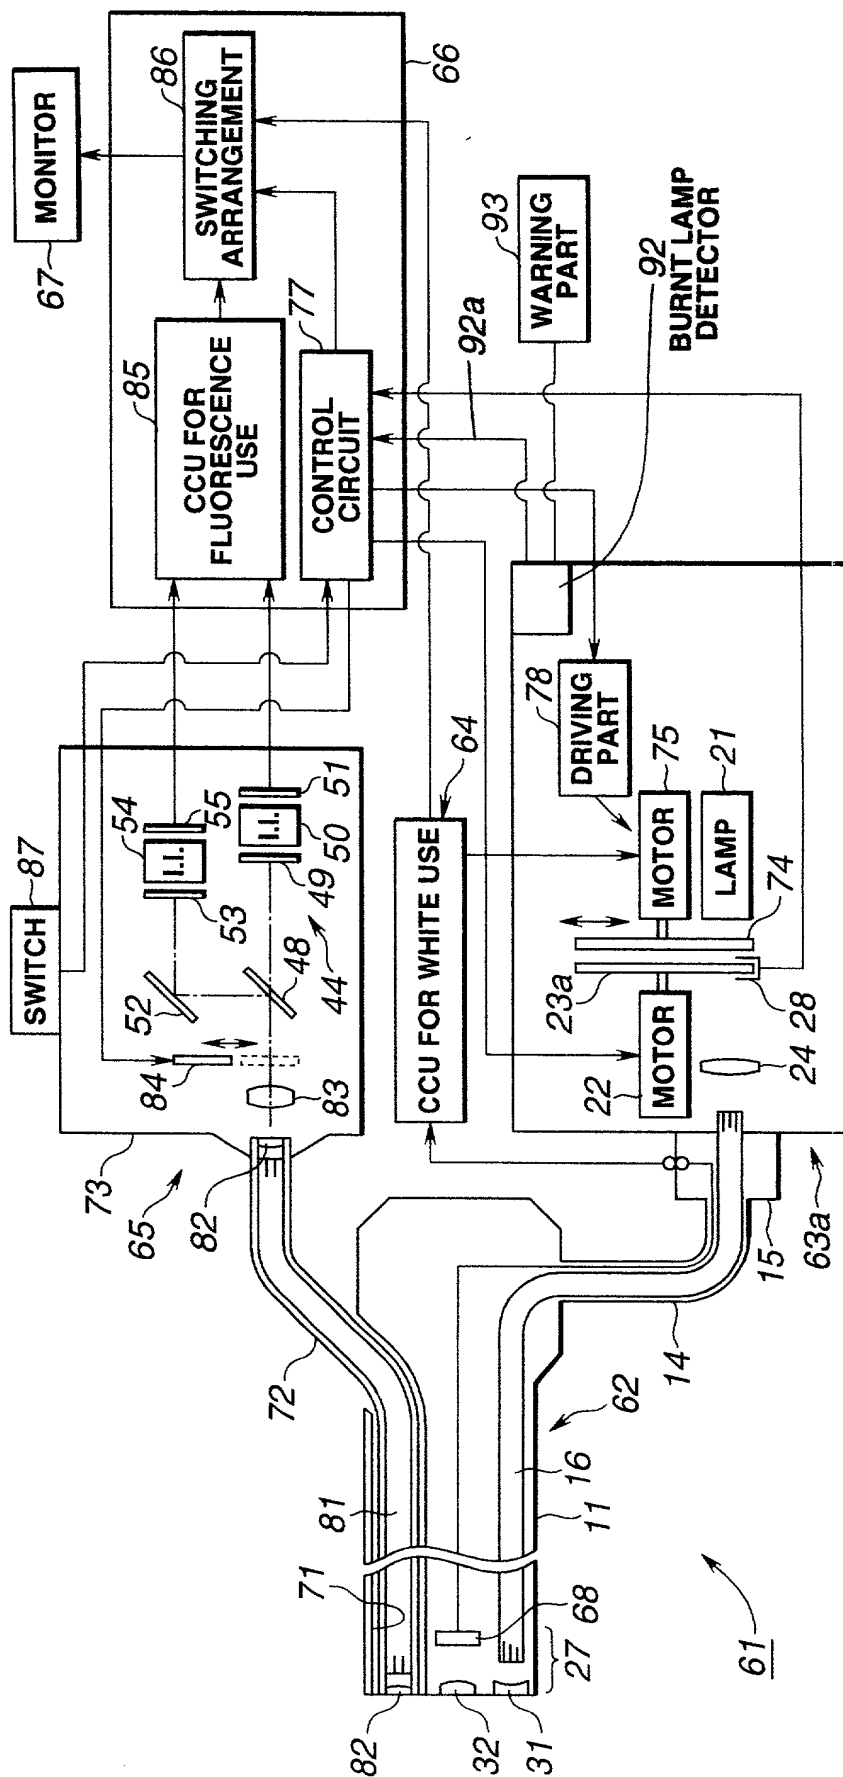


FIG.11

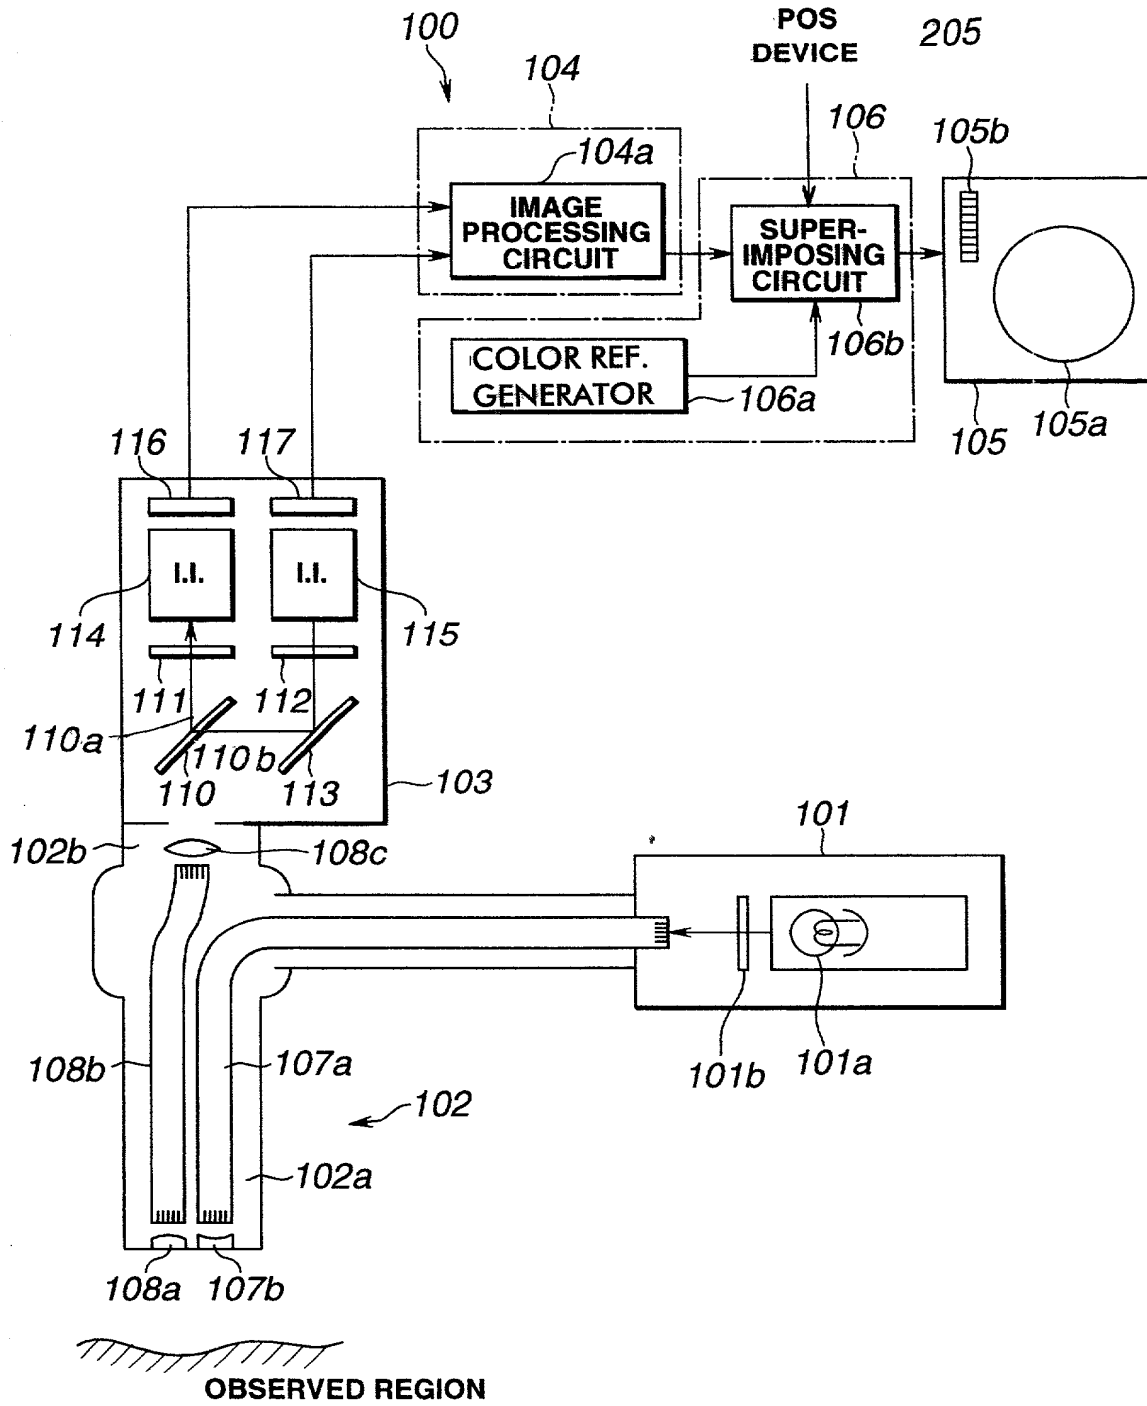


FIG.12

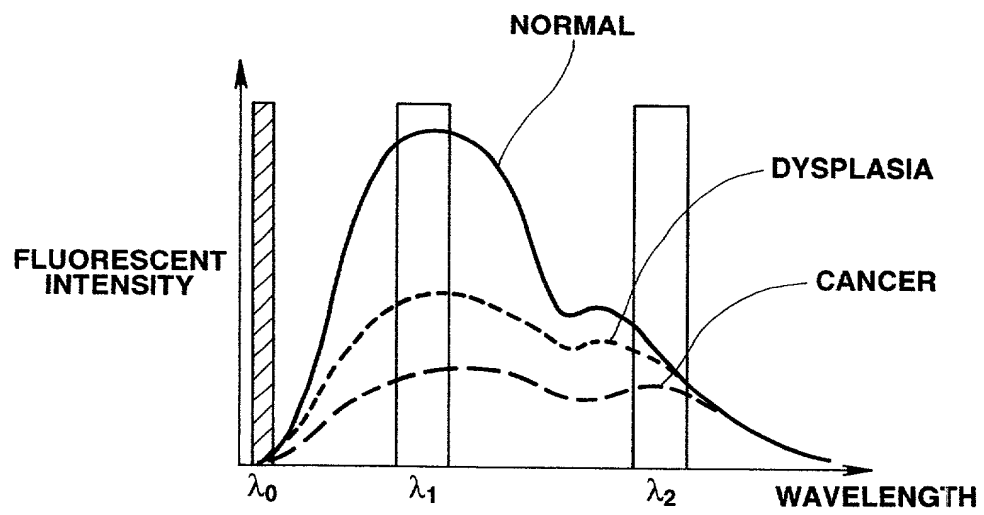


FIG.13

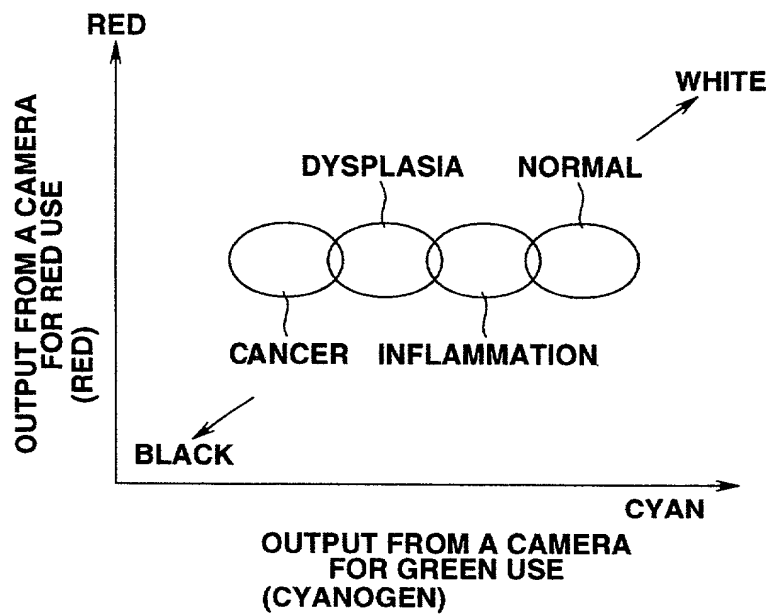


FIG.14

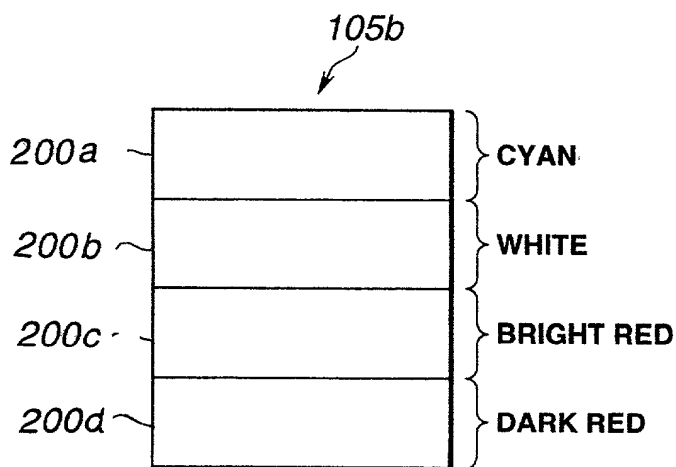


FIG.15

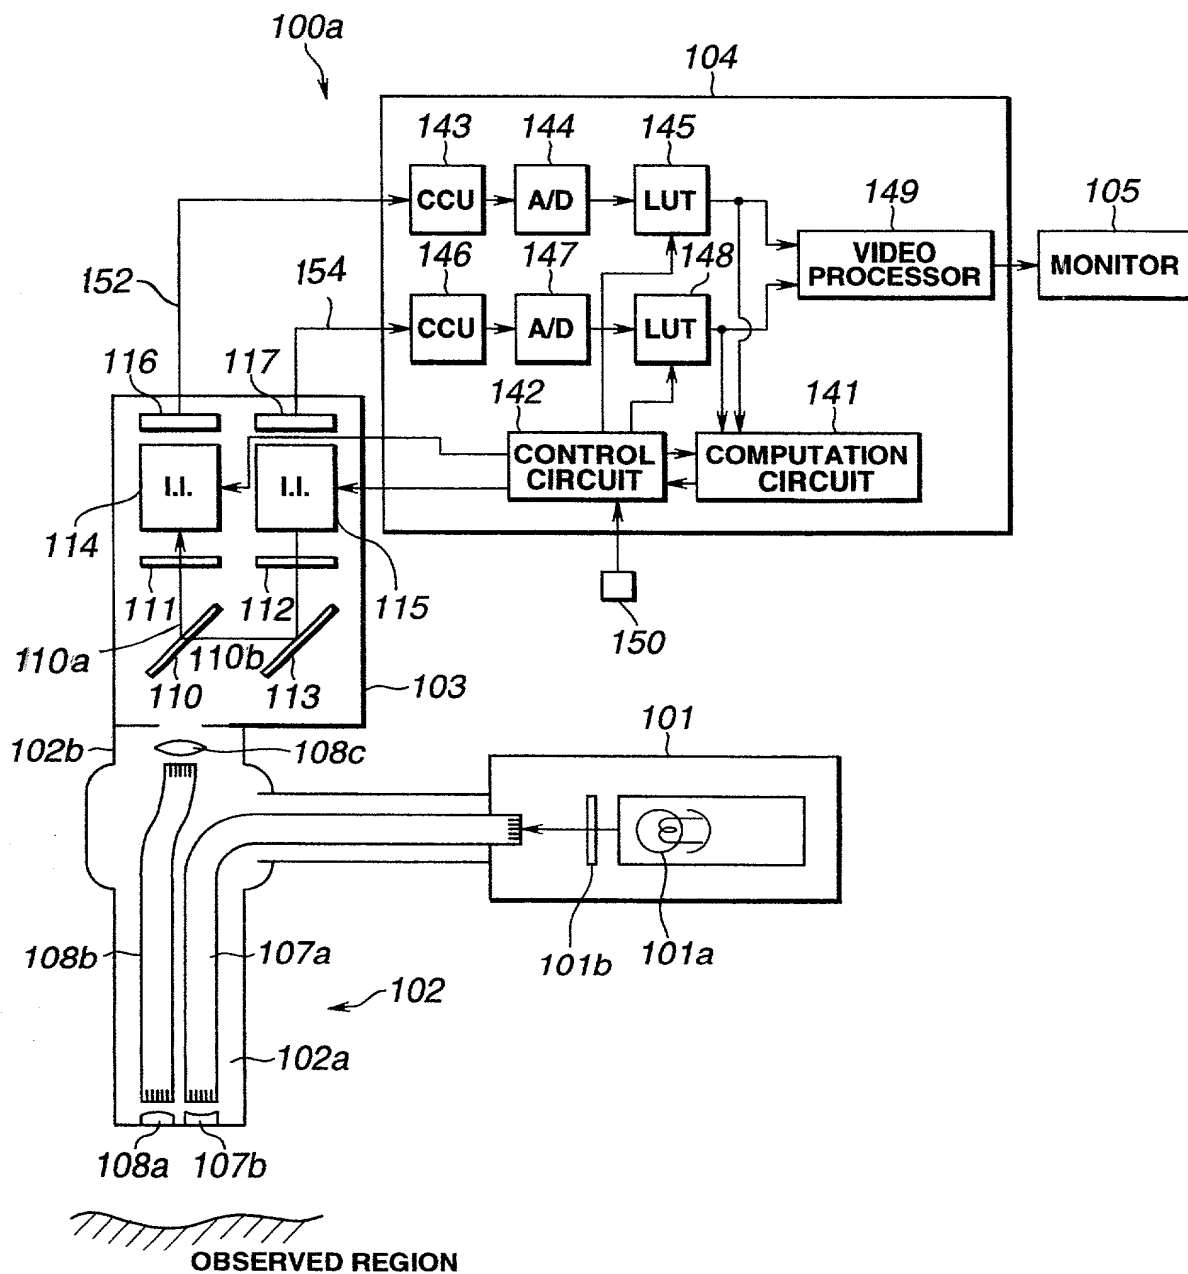


FIG.16A

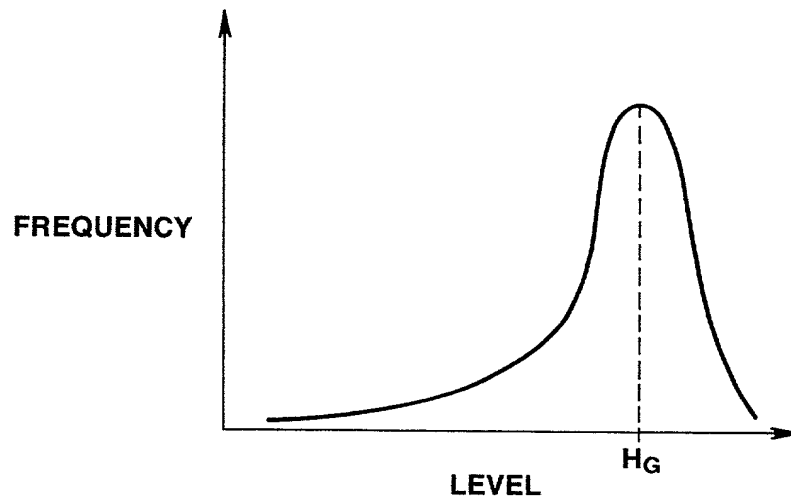


FIG.16B

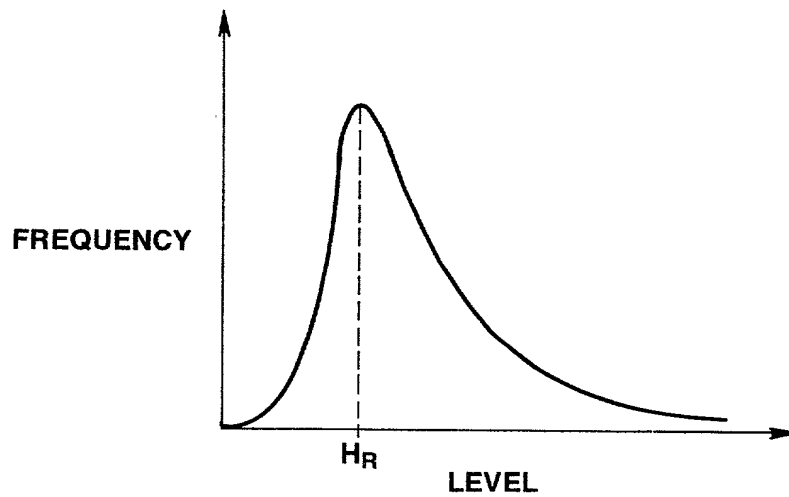
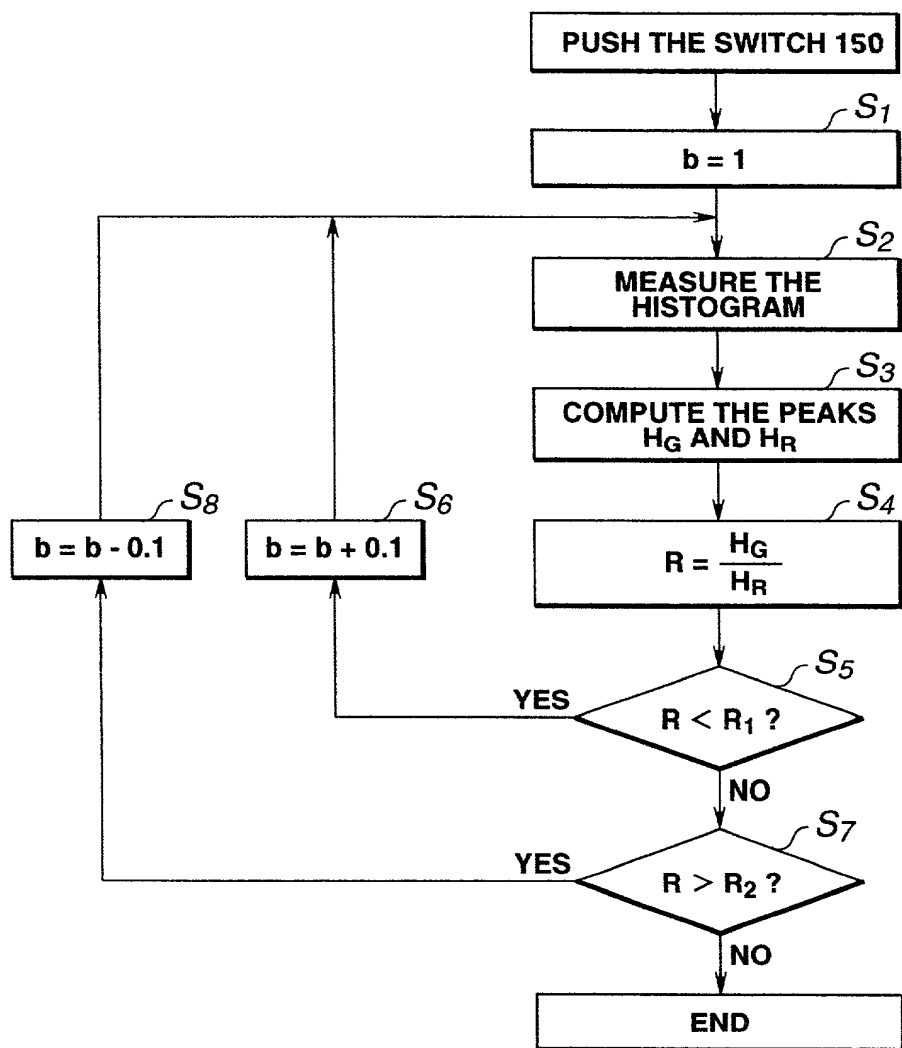


FIG.17



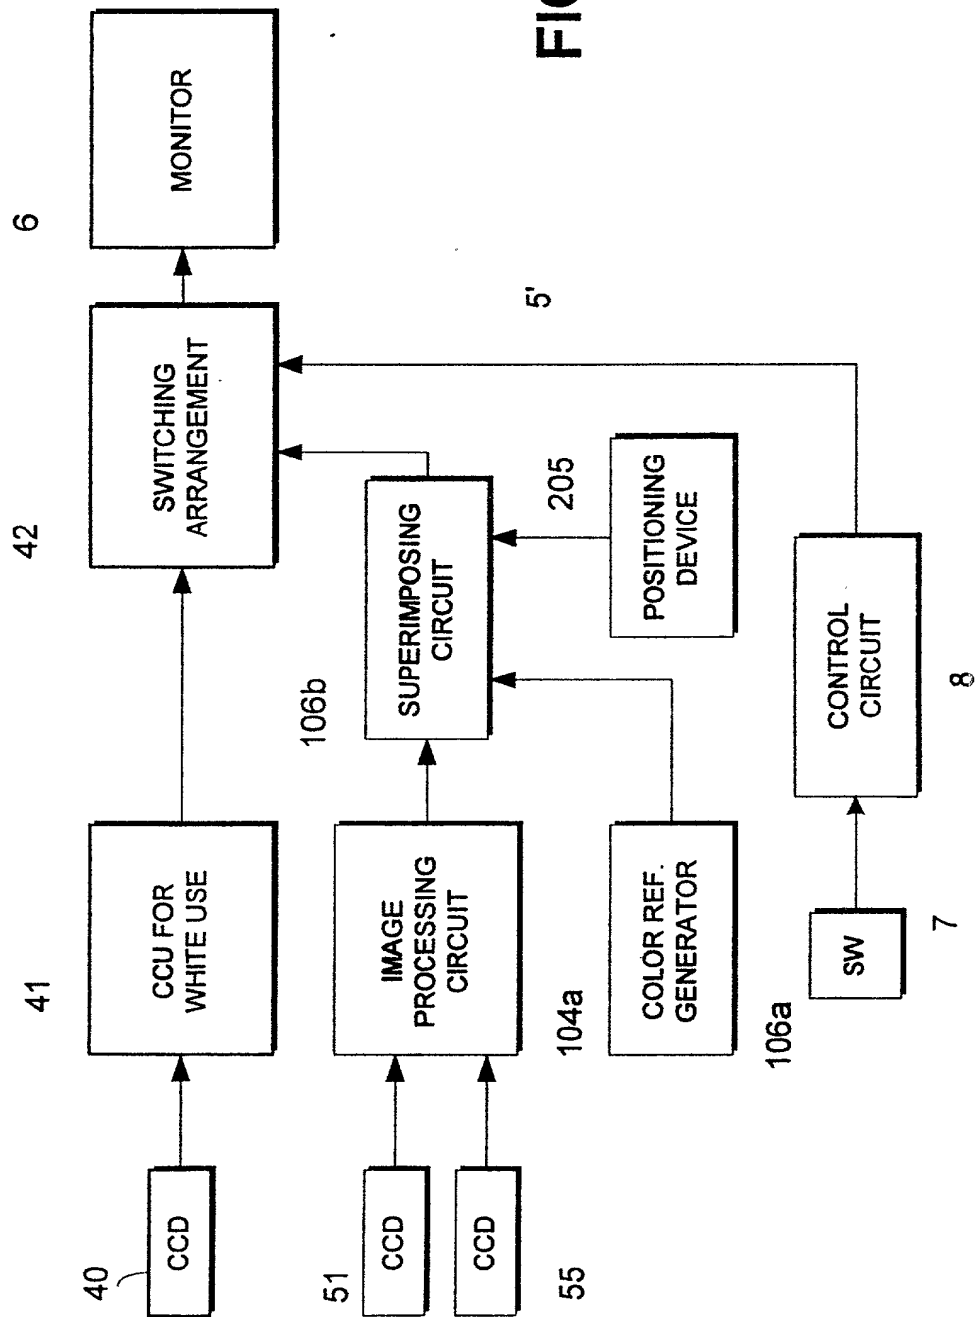


FIG. 18

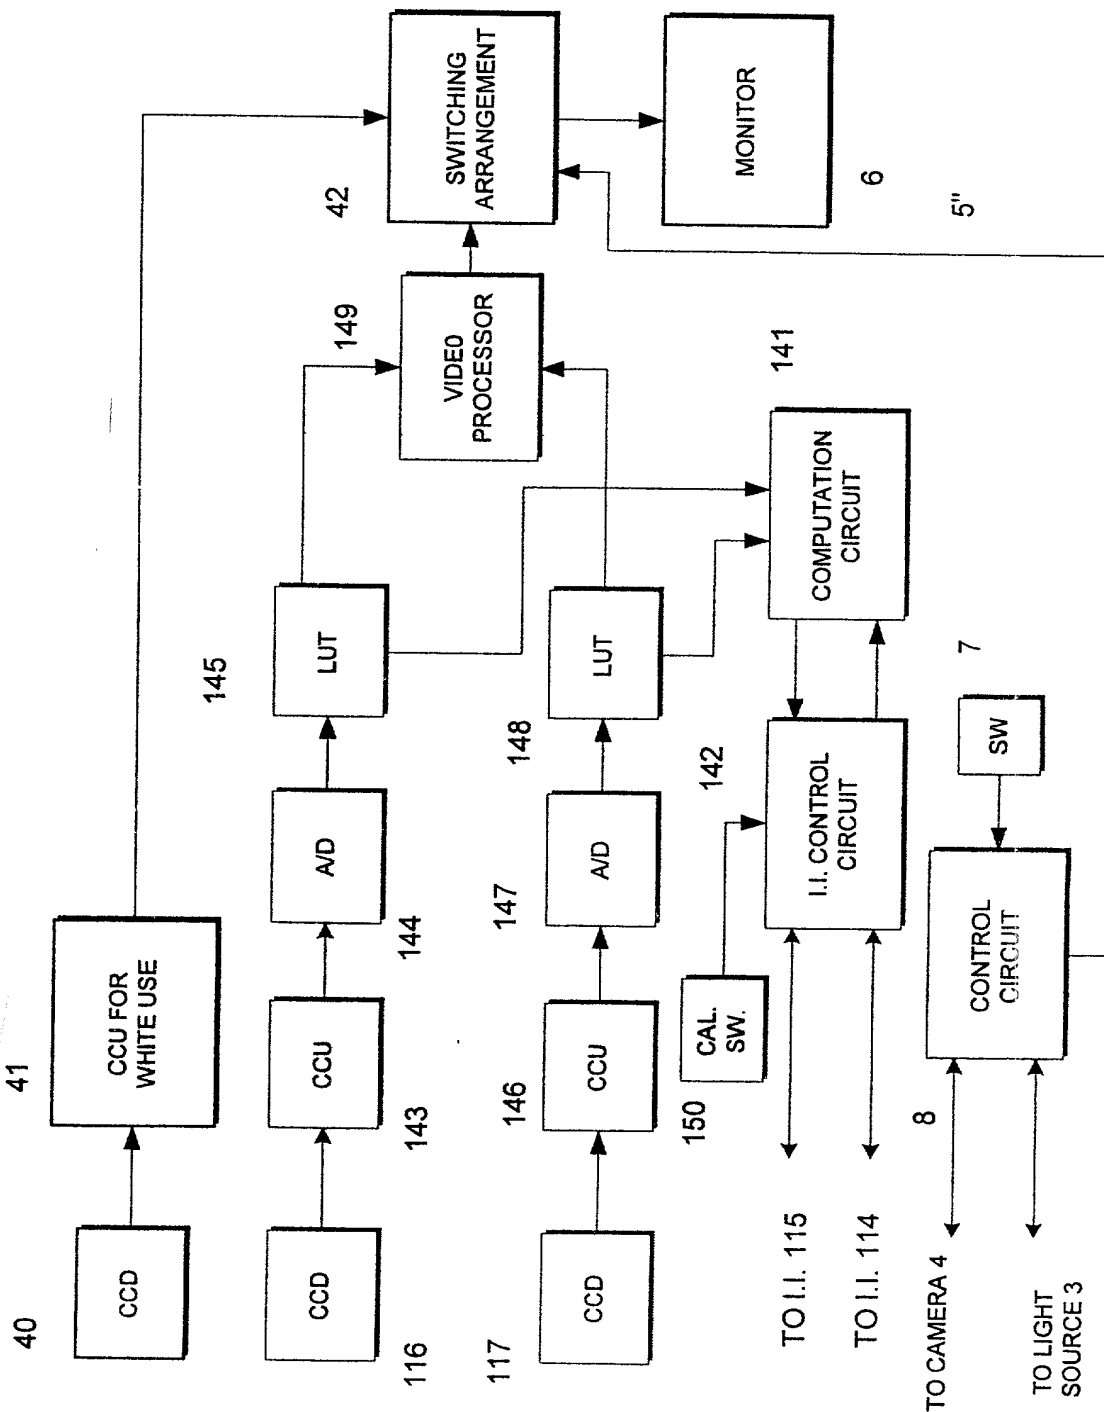


FIG. 19